

Shock-Safe Fuseholder, 5 x 20 / 6.3 x 32 mm, Fingerrip, horizontal



7091.7100 / 7091.7090



7091.7120 / 7091.7130

250 VAC · 16A (UL/CSA)



**Description**

- Screw type fuse carrier

**Standards**

- UL 4248-1 / UL 512  
- CSA C22.2 no. 39

**Approvals**

- UL File Number: E41738

**References**

We recommend for new applications the type FAU  
Last order date: 31.12.2013


**Weblinks**

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

**Technical Data**


Fuse-Link	5 x 20 or 6.3 x 32 mm	Soldering Methods	Wave
Mounting	PCB	Contact Resistance	< mΩ at 20 mV
Terminal	Solder THT	Resistance to Vibration	acc. to NF C 20-706 / IEC 60068-2-6, test Fc
Rated Voltage	250VAC	Shocks	acc. to NF C 20-706 / IEC 60068-2-27
Rated current	16A (UL/CSA)		
Degree of Protection	IP 40		
Admissible Ambient Air Temp.	-40°C to 85°C		
Climatic Category	40/085/56 acc. to IEC 60068-1		
Material: Socket	Thermoset, black		
Material: Cap	Thermoplastic, black		
Unit Weight	13 g		
Storage Conditions	0°C to 60°C, max. 70% r.h.		
Product Marking	Type, Rated voltage, Rated current, Approvals		

**Dimension**

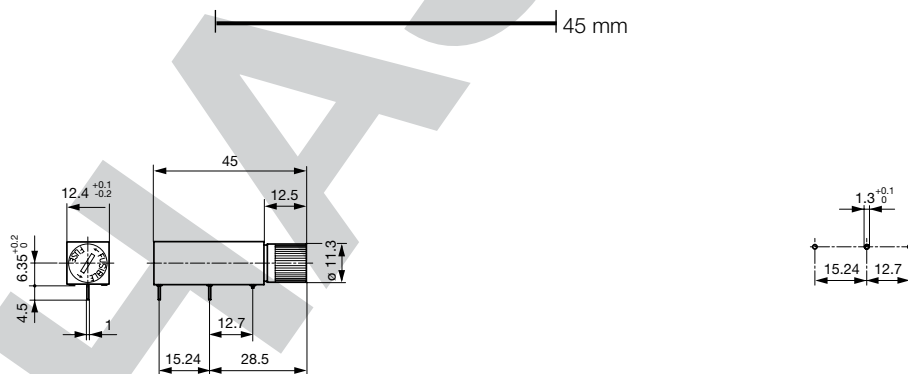

Drilling diagram

## All Variants

Holder	Cap	Fuse-Link		Reference	Order Number
	Fingergrip	5 x 20mm		231673	7091.7120
	Fingergrip	6.3 x 32mm		231672	7091.7130
●	-	5 x 20 or 6.3 x 32mm		231618	7091.7110

Availability for all products can be searched real-time:<http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

**Packaging Unit** Bulk (10 pcs.)

PHASE-OUT