

Shock-Safe Fuseholder, 5 x 20 / 6.3 x 32 mm, Fingergrip, EMI/RFI



250 VAC · 3.5W/16A (6.3x32)6.3A (5x20)



NNO

Description

- EMI / RFI shielding
- Screw type fuse carrier

References

This type is Phase-out without alternate type
Last order date: 16.04.2012


Weblinks

[pdf datasheet](#), [html-datasheet](#), [General Product Information](#), [Packaging details](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

Technical Data

Fuse-Link	5 x 20 or 6.3 x 32 mm	Soldering Methods	Iron Soldering Profile
Mounting	Panel Mount, Front Side	Contact Resistance	< mΩ at 20 mV
Attachment	Fixing Nut	Resistance to Vibration	acc. to NF C 20-706 / IEC 60068-2-6, test Fc
Terminal	Solder	Shocks	acc. to NF C 20-706 / IEC 60068-2-27
Rated Voltage	250 VAC	Bumps	acc. to NF C 20-729 / IEC 60068-2-29
Rated current	16 A (6.3x32), 6.3 A (5x20)	Salt Mist	acc. to NF C 20-711 / IEC 60068-2-11
Rated Power Acceptance IEC	3.5 W / 16 A @ Ta 23 °C	Dump Heat	acc. to NF C 20-604
Degree of Protection	IP 68	Climatic Composite	acc. to NF C 20-619 Phases D and F
Admissible Ambient Air Temp.	-55 °C to 125 °C	Admissible Torque on Fixing Nut	max 1.0 Nm
Climatic Category	55/125/56 acc. to IEC 60068-1	Nut	
Material: Socket	Thermoset, black	Plattendicke	max 5 mm
Unit Weight	42 g		
Storage Conditions	0 °C to 60 °C, max. 70% r.h.		
Product Marking	Type, Rated Voltage, Rated current		

Dimension

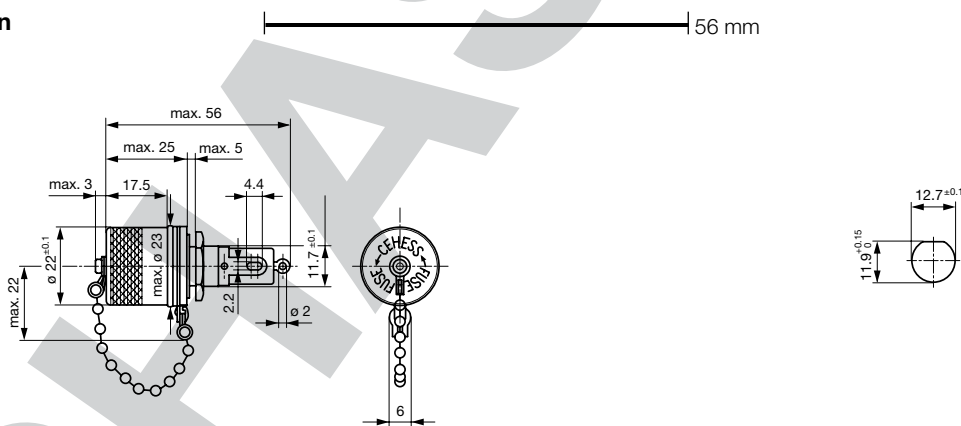

Mounting holes

All Variants

Holder	Cap	Fuse-Link	Rated Current [A]	Degree of Protection	NNO Reference	Order Number
•	Fingergrip	5 x 20mm	6.3	IP 68	231702D1	7092.2760

Availability for all products can be searched real-time:<http://www.schurter.com/Stock-Check/Stock-Check-SCHURTER>

Packaging Unit Bulk (10 pcs.)

PHASE-OUT