Circuit Breaker for Equipment thermal, Threaded neck type, Reset type, Screw terminals



See below:

Approvals and Compliances

Description

- Threaded neck type
- Thermal circuit breaker
- 1-pole
- Reset type
- Wide current range
- High breaking capacity
- Bolts and nuts

Unique Selling Proposition

- Compact design
- Positively trip-free release
- Available with cover
- Different mounting possibilities

Applications

- Power supplies
- Uninterruptible power supply
- Power tools
- Household appliances

Weblinks

Overload

pdf data sheet, html datasheet, General Product Information, Distributor-Stock-Check, Detailed request for product, Product News

IEC: min 40trins

Technical Data

Rated Voltage AC	AC 240/277 VAC, see approbations
Rated Voltage DC	28 VDC
Rated current range AC	0.05 - 30 A
Conditional short circuit capacity Inc	IEC 60934: PC1, AC 240 V: 1 kA
Short circuit capacity Icn	IEC 60934: at ln < 7 A/240 VAC : 8 x ln
	IEC 60934: at In ≥ 7 A/240 VAC : 400 A
	AC/DC 28 V : 400 A
Degree of Protection	front side IP40 acc. to IEC 60529
Dielectric Strength	50Hz: 1.5kV
	Impulse 1.2/50 µs: > 2.5 kV
Insulation Resistance	$500\text{VDC} > 100\text{M}\Omega$
Endurance typical	2 x Ir: 3000 switching cycles
Endurance minimum	Reset type
	AC: 2 x lr, cos φ 0.6:
	DC: $2 \times Ir$, $L/R = 2 - 3 \text{ ms}$:
	50 switching cycles

Overload	1EO. 111111. 40 trips
	@ 6 x lr, cos φ 0.6
	UL / CSA: min. 50 trips
	@ 1.5 x lr, cos φ 0.75
Allowable Operation Temp.	-5°C to 60°C
Vibration Resistance	± 1.5 mm @ 10 - 60 Hz
	acc. to IEC 60068-2-6, test Fc
	10 G @ 60 - 500 Hz
	acc. to IEC 60068-2-6, test Fc
Shock Resistance	100 G / 6ms
	acc. to IEC 60068-2-27, test Ea
Tripping Type	Thermal
Actuation Type	Reset type
Weight	ca. 10g

Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products. Approval Reference Type: T13

Approval Logo Certificates Certification Body	Description
VDE Approvals VDE	VDE Certificate Number: 123283
FLI ° UL Approvals UL	UR File Number: E71572
GSA Approvals CSA	CSA Certification Record: LR 37712
CCC Approvals CCC	CCC Certificate Number: 2024010307696712

Product standards

Product standards that are referenced

Organization	Design	Standard	Description
<u>IEC</u>	Designed according to	IEC 60934	Circuit-breakers for equipment (CBE)
(UL)	Designed according to	UL 1077	Standard for Supplementary Protectors for Use in Electrical Equipment
GF Group	Designed according to	CSA C22.2 No. 235	Supplementary Protectors
(3)	Designed according to	GB 17701	Circuit-breaker for equipment

Application standards

Application standards where the product can be used

Organization	Design	Standard	Description
<u>IEC</u>	Suitable for applications acc.	IEC/UL 62368-1	Audio/video, information and communication technology equipment - Part 1: Safety requirements

Compliances


The product complies with following Guide Lines


Identification	Details	Initiator	Description
C€	CE declaration of conformity	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
UK CA	UKCA declaration of conformity	SCHURTER AG	The UKCA marking declares that the product complies with the applicable requirements laid down in the British Amendment of Regulation (EC) 765/2008.
RoHS	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863
50	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.

Dimension [mm]

T13-212



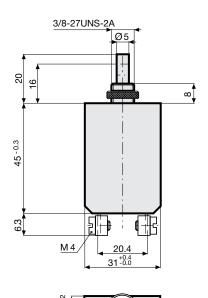








Diagrams

T13-...



Approval		Rated current	Rated Voltage AC	Rated Voltage DC
	UL 1077	0.0530 A	277 V	28 V
	CSA C22.2 No. 235	0.0530 A	277 V	28 V
	EN 60934	0.0530 A	240 V	-
	GB 17701	0.0530 A	240 V	-

Typical internal resistance per pole

rypical internal resistance per pole		
Rated Current [A]	Internal Resistance [Ω]	
0.05	376.500	
0.50	4.40	
1.00	1.10	
2.00	0.31	
3.00	0.14	
4.00	0.068	
5.00	0.048	
6.00	0.033	
8.00	0.026	
9.00	0.0125	
10.00	0.0125	
11.00	0.0085	
12.00	0.0085	
13.00	0.0085	
14.00	0.007	
15.00	0.007	
16.00	0.007	
17.00	0.0047	
18.00	0.0047	
19.00	0.0047	
20.00	0.004	
21.00	0.0035	
22.00	0.003	
23.00	0.003	
24.00	0.003	
25.00	0.003	
26.00	0.0022	
27.00	0.002	
28.00	0.002	
29.00	0.002	
30.00	0.002	


Effect of ambient temperature

The units are calibrated for an ambient temperature of +23°C. To determine the rated current for a lower or higher ambient temperature, use a correction factor (typical value) from the table below:

Ambient Temperature [°C]	Correction factor
-5	0.88
0	0.90
10	0.95
23	1.00
30	1.05
40	1.10
50	1.18
60	1.26

Example: Rated current = 5 A, Environmental temperature = 40 °C, --> Correction factor = 1.1, Resulting current = 5.5 A --> Round to next higher rated current: 6 A

Time-Current-Curves

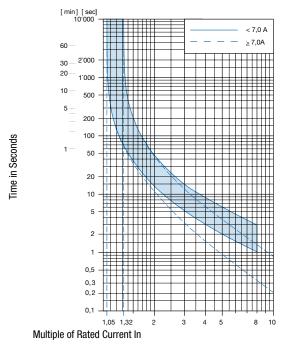

Ambient temperature +23°

Config. Code

T13 - 1 2 3 B - 1.23

The characters are placeholders for the correspondingly keys of selections from the key tables.

Mounting Configuration key Threaded neck type with knurled nut 2 T13 - 1 2 3 B - 1.23 = Actuation Type Actuation Type Configuration key Reset type 1 T13 - 1 2 3 B - 1.23 = Terminal Terminal Configuration key Screw clamp terminals 2 T13 - 1 2 3 B - 1.23 = Setting indication Setting indication R T13 - 1 2 3 B - 1.23 = Rated current Rated current Configuration key 0.05 A 0.05 0.1 A 0.15 A 0.15	T13 - 1 2 3 B - 1.23 = Mounting	
T13 - 1 2 3 B - 1.23 = Actuation Type Actuation Type Configuration key Reset type 1 T13 - 1 2 3 B - 1.23 = Terminal Terminal Configuration key Screw clamp terminals 2 T13 - 1 2 3 B - 1.23 = Setting indication Setting indication Configuration key Setting indication R T13 - 1 2 3 B - 1.23 = Rated current Rated current Configuration key 0.05 A 0.05 0.1 A 0.05	Mounting	-
Actuation Type Reset type 1 T13 - 1 2 3 B - 1.23 = Terminal Terminal Configuration key Screw clamp terminals 2 T13 - 1 2 3 B - 1.23 = Setting indication Setting indication Configuration key Setting indication R T13 - 1 2 3 B - 1.23 = Rated current Rated current Configuration key 0.05 A 0.05 0.1 A 0.05	Threaded neck type with knurled nut	2
Reset type 1 T13 - 1 2 3 B - 1.23 = Terminal Terminal Configuration key Screw clamp terminals 2 T13 - 1 2 3 B - 1.23 = Setting indication Setting indication R T13 - 1 2 3 B - 1.23 = Rated current Configuration key Rated current Configuration key 0.05 A 0.05 0.1 A 0.1	T13 - 1 2 3 B - 1.23 = Actuation Type	
T13 - 1 2 3 B - 1.23 = Terminal Terminal Configuration key Screw clamp terminals 2 T13 - 1 2 3 B - 1.23 = Setting indication Setting indication Configuration key Setting indication R T13 - 1 2 3 B - 1.23 = Rated current Rated current Configuration key 0.05 A 0.05 0.1 A 0.1	Actuation Type	
Terminal Configuration key Screw clamp terminals 2 T13 - 1 2 3 B - 1.23 = Setting indication Setting indication Configuration key Setting indication R T13 - 1 2 3 B - 1.23 = Rated current Rated current Configuration key 0.05 A 0.05 0.1 A 0.1	Reset type	1
Screw clamp terminals 2 T13 - 1 2 3 B - 1.23 = Setting indication Setting indication Configuration key Setting indication R T13 - 1 2 3 B - 1.23 = Rated current Rated current Configuration key 0.05 A 0.05 0.1 A 0.01	T13 - 1 2 3 B - 1.23 = Terminal	
Setting indication Setting indication Configuration key Setting indication R T13 - 1 2 3 B - 1.23 = Rated current Rated current Configuration key 0.05 A 0.05 0.1 A 0.1	Terminal	•
Setting indication Setting indication R T13 - 1 2 3 B - 1.23 = Rated current Rated current Configuration key 0.05 A 0.05 0.1 A 0.1	Screw clamp terminals	2
key Setting indication R T13 - 1 2 3 B - 1.23 = Rated current Rated current Configuration key 0.05 A 0.05 0.1 A 0.1	T13 - 1 2 3 B - 1.23 = Setting indication	
T13 - 1 2 3 B - 1.23 = Rated current Rated current Configuration key 0.05 A 0.05 0.1 A 0.1	Setting indication	•
Rated current Configuration key 0.05 A 0.05 0.1 A 0.1	Setting indication	R
key 0.05 A 0.05 0.1 A 0.1	T13 - 1 2 3 B - 1.23 = Rated current	
0.1 A 0.1	Rated current	
	0.05 A	0.05
0.15 A 0.15	0.1 A	0.1
2.12	0.15 A	0.15

3.0 A	3
2.8 A	2.8
2.5 A	2.5
2.3 A	2.3
2.1 A	2.1
2.0 A	2
1.9 A	1.9
1.8 A	1.8
1.7 A	1.7
1.6 A	1.6
1.5 A	1.5
1.4 A	1.4
1.3 A	1.3
1.2 A	1.2
1.1 A	1.1
1.0	1
0.9 A	0.9
0.8 A	0.8
0.7 A	0.7
0.6 A	0.6
0.5 A	0.5
0.4 A	0.4
	0.0

Other rated currents on request

Rated current

0.2 A

0.3 A

Configuration key

0.2

0.3

Rated current	Configuration key	Rated current	Configuration key
3.3 A	3.3	11.0 A	11
3.5 A	3.5	12.0 A	12
4.0 A	4	13.0 A	13
4.5 A	4.5	14.0 A	14
5.0 A	5	15.0 A	15
5.5 A	5.5	16.0 A	16
6.0	6	17.0 A	17
6.5 A	6.5	18.0 A	18
7.0 A	7	19.0 A	19
7.5 A	7.5	20.0 A	20
8.0 A	8	22.0 A	22
8.5 A	8.5	25.0 A	25
9.0 A	9	28.0 A	28
9.5 A	9.5	30.0 A	30
10.0 A	10	Other rated currents on request	
Other rated currents on request			

Variants

Rated current	Setting indication	Config. Code	Order Number
16.0 A		T13-212-16	4411.0012
30.0 A		T13-212-30	4411.0067
12.0 A		T13-212-12	4411.0099
15.0 A	•	T13-212R-15	4411.0211

Availability for all products can be searched real-time: https://www.schurter.com/en/info-center/support-tools/stock-check-distributors

Packaging Unit

20 Pcs

Accessories

Description



T-Line_Accessories
Accessories to T-Line