Circuit Breaker for Equipment thermal-magnetic, Threaded neck type, Reset type, Quick connect terminals



See below:

Approvals and Compliances

Description

- Threaded neck type
- TMF12-211 Thermal-magnetic circuit breaker
- 1-pole
- Reset type
- Insensitive to shock or vibration
- Quick connect terminals 6.3 x 0.8 mm

Unique Selling Proposition

- Tripping characteristic Fast or Slow
- Positively trip-free release
- Protection cover for IP54 available
- Different mounting possibilities

Applications

- Power supplies
- Uninterruptible power supply
- Power tools
- Household appliances

References

Weblinks

pdf data sheet, html datasheet, General Product Information, Distributor-Stock-Check, Detailed request for product, Product News

Technical Data

AC 240 VAC
28 VDC
0.05 - 15 A, see approbations
IEC 60934: PC1, AC 240 V: 1 kA
IEC 60934: AC 240 V : 200 A
AC/DC 28 V : 400 A
front side IP40 acc. to IEC 60529
50 Hz: > 1.5 kV
Impulse 1.2/50 µs: > 2.5 kV
$500 \text{VDC} > 100 \text{ M}\Omega$
2 x lr: 5000 switching cycles
Reset type AC: $2 \times Ir$, $\cos \varphi$ 0.6: DC: $2 \times Ir$, $L/R = 2 - 3 \text{ ms}$: 50 switching cycles

Overload	IEC: min. 40 trips
	@ 6 x lr, cos φ 0.6
	UL / CSA: min. 50 trips
	@ 1.5 x lr, cos φ 0.75
Allowable Operation Temp.	-5 °C to 60 °C
Vibration Resistance	± 1.5 mm @ 10 - 60 Hz
	acc. to IEC 60068-2-6, test Fc
	10 G @ 60 - 500 Hz
	acc. to IEC 60068-2-6, test Fc
Shock Resistance	100 G / 6ms
	acc. to IEC 60068-2-27, test Ea
Tripping Type	Thermal-Magnetic
Actuation Type	Reset type
Weight	ca. 10 q

Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products. Approval Reference Type: TM12

Approval Logo	Certificates	Certification Body	Description
	VDE Approvals	VDE	VDE Certificate Number: 99673
c Al °us	UL Approvals	UL	UR File Number: E71572
(P)	CSA Approvals	CSA	CSA Certification Record: LR 37712
<u></u>	CCC Approvals	ccc	CCC Certificate Number: 2020970307003504

Product standards

Product standards that are referenced

Organization	Design	Standard	Description
<u>IEC.</u>	Designed according to	IEC 60934	Circuit-breakers for equipment (CBE)
(UL)	Designed according to	UL 1077	Standard for Supplementary Protectors for Use in Electrical Equipment
(W)	Designed according to	GB 17701	Circuit-breaker for equipment

Application standards

Application standards where the product can be used

Organization	Design	Standard	Description
<u>IEC</u>	Suitable for applications acc.	IEC/UL 62368-1	Audio/video, information and communication technology equipment - Part 1: Safety requirements


Compliances

The product complies with following Guide Lines


Identification	Details	Initiator	Description
C€	CE declaration of conformity	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
UK CA	UKCA declaration of conformity	SCHURTER AG	The UKCA marking declares that the product complies with the applicable requirements laid down in the British Amendment of Regulation (EC) 765/2008.
RoHS	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863
50	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.


Dimension [mm]

TMx12-211

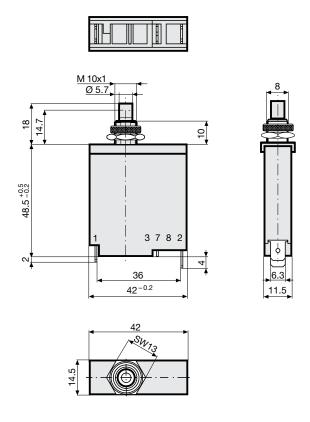


TMx12-211N

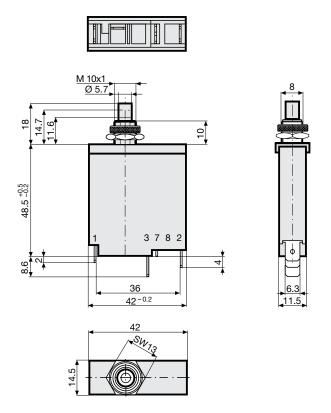




Diagrams


TM12-...




TM12-...N



TM12-...S



TM12-...SN



Approval		Main circuit			Auxiliary circuit		
		Rated current	Rated Voltage AC	Rated Voltage DC	Rated current	Rated Voltage AC	Rated Voltage DC
	UL 1077 CSA C22.2 No. 235	0.0515 A	240 V	28 V	2 A 3 A	120 V -	- 28 V
	CSA C22.2 No. 235	0.0516 A	240 V	28 V	1 A	240 V	-
	EN 60934	0.0516 A	240 V	28 V	1 A	240 V	28 V
	GB 17701	0.0516 A	240 V	28 V	1 A	240 V	28 V

Typical internal resistance TMF12

Rated Current [A]	Internal Resistance [Ω]
0.05	335.00
0.50	4.37
1.00	1.23
2.00	0.369
3.00	0.181
4.00	0.097
5.00	0.055
6.00	0.044
7.00	0.0231
8.00	0.0227
9.00	0.0142
10.00	0.0123
11.00	0.012
12.00	0.012
13.00	0.0108
14.00	0.0091
15.00	0.0089
16.00	0.0071

Typical internal resistance TMT12

Typical internal redictance Tivil 12		
Rated Current [A]	Internal Resistance [Ω]	
0.05	260.00	
0.50	4.03	
1.00	1.006	
2.00	0.323	
3.00	0.161	
4.00	0.086	
5.00	0.0494	
6.00	0.0396	
7.00	0.0257	
8.00	0.0249	
9.00	0.0129	
10.00	0.0112	
11.00	0.0111	
12.00	0.0111	
13.00	0.0109	
14.00	0.0092	
15.00	0.0090	
16.00	0.0075	


Effect of ambient temperature

The units are calibrated for an ambient temperature of +23°C. To determine the rated current for a lower or higher ambient temperature, use a correction factor (typical value) from the table below:

Ambient Temperature [°C]	Correction factor
-5	0.87
0	0.90
10	0.95
23	1.00
30	1.05
40	1.12
50	1.20
60	1.30

Example: Rated current = 5 A, Environmental temperature = 50 °C, --> Correction factor = 1.2, Resulting current = 6.0 A

Time-Current-Curves

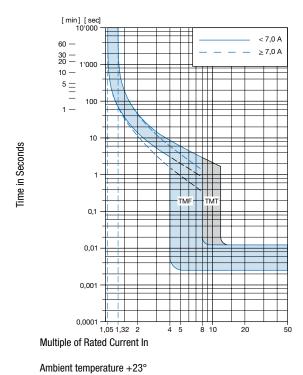

Config. Code

TM F 12 - 1 2 3 A B C - 1.23

The characters are placeholders for the correspondingly keys of selections from the key tables.

TM F 12 - 1 2 3 A B C - 1.23 = Magnetic release ra	inge
Magnetic release range	Configuration key
Fast	F
Slow	Т
TM F 12 - 1 2 3 A B C - 1.23 = Mounting	
Mounting	Configuration key
Threaded neck type with hexagonal- and knurled nut	2
TM F 12 - 1 2 3 A B C - 1.23 = Actuation Type	
Actuation Type	Configuration key
Reset type	1
TM F 12 - 1 2 3 A B C - 1.23 = Terminal	
Terminal	Configuration key
Quick connect terminal 6.3x0.8mm	1
TM F 12 - 1 2 3 A B C - 1.23 = Auxiliary contact	
Auxiliary contact	Configuration key
Auxiliary contact	S
TM F 12 - 1 2 3 A B C - 1.23 = Shunt terminal	

	Configuration key
Shunt terminal	N
TM F 12 - 1 2 3 A B C - 1.23 = Setting indication	
Setting indication	Configuration key
Setting indication	R
TM F 12 - 1 2 3 A B C - 1.23 = Rated current	
Rated current	Configuration key
0.05 A	0.05
0.1 A	0.1
0.15 A	0.15
0.2 A	0.2
0.3 A	0.3
0.4 A	0.4
0.5 A	0.5
0.6 A	0.6
0.7 A	0.7
0.8 A	0.8
0.9 A	0.9
1.0	1
1.1 A	1.1
1.2 A	1.2
1.3 A	1.3

Rated current	Configuration key	Rated current	Configuration key
1.4 A	1.4	5.0 A	5
1.5 A	1.5	5.5 A	5.5
1.6 A	1.6	6.0	6
1.7 A	1.7	6.5 A	6.5
1.8 A	1.8	7.0 A	7
1.9 A	1.9	7.5 A	7.5
2.0 A	2	8.0 A	8
2.1 A	2.1	8.5 A	8.5
2.3 A	2.3	9.0 A	9
2.5 A	2.5	9.5 A	9.5
2.8 A	2.8	10.0 A	10
3.0 A	3	11.0 A	11
3.3 A	3.3	12.0 A	12
3.5 A	3.5	13.0 A	13
4.0 A	4	14.0 A	14
4.5 A	4.5	15.0 A	15
Other rated currents on request		16.0 A	16
		Other rated currents on request	

Variants

Rated Current [A]	Construction variants		Config. Code	Order Number	
	Auxiliary contact	Shunt terminal	Setting indication		
0.1		•		TMF12-211N-0.1	4410.0732
1.8				TMT12-211-1.8	4410.0055
3				TMT12-211-3	4410.0124
4	•			TMF12-211S-4	4410.0453
4			•	TMT12-211R-4	4410.0805
10				TMT12-211-10	4410.0056
13				TMT12-211-13	4410.0138
16				TMF12-211-16	4410.0078

Availability for all products can be searched real-time: https://www.schurter.com/en/info-center/support-tools/stock-check-distributors

Packaging Unit 20 Pcs

Accessories

Description



T-Line_Accessories Accessories to T-Line